




# CA-1GSFPMM

## MultiMode Mini-GBIC

### LC Module

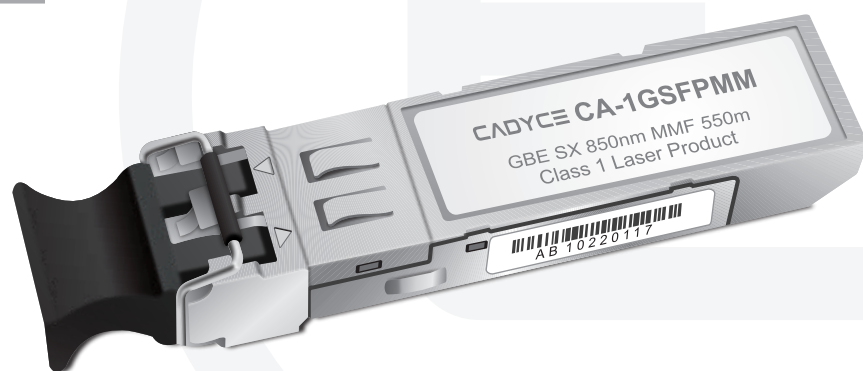

Cadyce Mini-GBIC Fiber modules are compact and Hot-pluggable which can be used for both telecommunication and data communication applications.

### Features:

- 850nm VCSEL • Data Rate: 1.25Gbps, NRZ • Single +3.3V Power Supply • RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Compliant with SFF-8472 Digital Diagnostic MonitoringInterface ( optional )
- Duplex LC Connector • Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25 Gbps
- Compliance with ANSI specifications for Fibre Channel applications at 1.06 Gbps • For distances up to 550m
- Eye Safety-Designed to meet Laser Class 1 comply with EN60825-1

### Application:

Gigabit Ethernet Links • Fiber Channel Links at 1.06 Gbps • High Speed Backplane Interconnects • Switched Backbones

### Description:

The The CA-1GSFPMM from CADYCE is the high performance and cost-effective module for serial optical data communication applications specified for multimode of 1.25 Gb/s. It operates with +3.3V power supply. The module is intended for multimode fiber, operates at a nominal wavelength of 850nm and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module is integrated digital diagnostics functions via an I2C serial interface ( optional )

The module is a duplex LC connector transceiver designed for use in Gigabit Ethernet applications and to provide IEEE-802.3z compliant link for 1.25Gb/s short reach applications. The characteristics are performed in accordance with Telcordia Specification GR-468-CORE..

### EMC:

Most Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

### Eye Safety:

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.

### Absolute Max Ratings:

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Storage Temperature	T <sub>S</sub>	-40	85	°C	
Supply Voltage	V <sub>CC</sub>	0	6	V	
Supply Current	I <sub>S</sub>		240	mA	

### Operating Conditions:

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Supply Voltage	V <sub>CC</sub>	3.1		3.5	V	
Data Input Voltage Swing	V <sub>ID</sub>	400		1660	mV	

Electrical Characteristics:

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Transmitter					
Transmitter Supply Current	I <sub>CCT</sub>		140	mA	
Tx_ Disable Input Voltage – Low	V <sub>IL</sub>	0	0.8	V	
Tx_ Disable Input Voltage – High	V <sub>IH</sub>	2.0	Vcc	V	
Tx_ Fault Output Voltage – Low	V <sub>OL</sub>	0	0.8	V	
Tx_ Fault Output Voltage – High	V <sub>OH</sub>	2.0	Vcc	V	
Receiver					
Receiver Supply Current	I <sub>CCR</sub>		100	mA	
Receiver Data Output Differential Voltage	V <sub>OD</sub>	0.4	1.3	V	
Rx_LOS Output Voltage – Low	V <sub>OL</sub>	0	0.8	V	
Rx_LOS Output Voltage – High	V <sub>OH</sub>	2.0	Vcc	V	
MOD_DEF (1) , MOD_DEF (2) - Low	V <sub>IL</sub>	-0.6	Vcc x 0.3	V	
MOD_DEF (1) , MOD_DEF (2) - High	V <sub>IH</sub>	Vcc x 0.7	Vcc + 0.5	V	

Transmitter Electro-optical Characteristics:

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Optical Output Power	Po	-9.5		-3	dBm	1
Extinction Ratio	ER	9			dB	
Center Wavelength	λc	1275		1355	nm	2
Spectral Width (RMS)	Δλ			3	nm	2
RIN	RIN			-117	dB/Hz	
Coupled Power Ratio	CPR	9			dB	2
Optical Rise time (20%-80% )	t <sub>r</sub>			260	ps	3
Optical Fall time (20%-80% )	t <sub>f</sub>			260	ps	3
Output Eye	Compliant with IEEE802.3z/D5.0					

Receiver Electro-optical Characteristics:


PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Maximum Input Optical Power	Pmax	-3			dBm	4
Minimum Input Optical Power	Pmin			-17	dBm	4
Operating Wavelength	λ	770		860	nm	
Optical Return Loss	ORL	12			dB	
Receiver Electrical 3dB Upper Cutoff Frequency	---			1500	MHz	
LOS of Signal – Asserted	P <sub>A</sub>	-30			dBm	
LOS of Signal – Deasserted	P <sub>D</sub>			-16	dBm	
Loss of Signal –Hysterisis	P <sub>D</sub> -P <sub>A</sub>	0.5			dB	

- Note:
- 1. Measured average power coupled into 62.5/125μm, 0.275 NA or 50/125μm, 0.2 NA graded index multimode Fiber.
  - 2. CPR is measured in accordance with EIA/TIA-526-14A as referenced in IEEE 802.3 section 38.6.10.
  - 3. These are 20-80% values.
  - 4. Measured with 27-1 PRBS at BER<10-12


Timing Characteristics:

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
TX_DISABLE Assert Time	t <sub>off</sub>			10	μs	
TX_DISABLE Negate Time	t <sub>on</sub>			1	ms	
Time to initialize, include reset of TX_FAULT	t <sub>init</sub>			300	ms	
TX_FAULT from fault to assertion	t <sub>fault</sub>			100	μs	
TX_DISABLE time to start reset	t <sub>reset</sub>	10			μs	
Receiver Loss of Signal Assert Time (off to on)	t <sub>A,RX_LOS</sub>			100	μs	
Receiver Loss of Signal Assert Time (on to off)	t <sub>D,RX_LOS</sub>			100	μs	

Block Diagram of Transceiver:

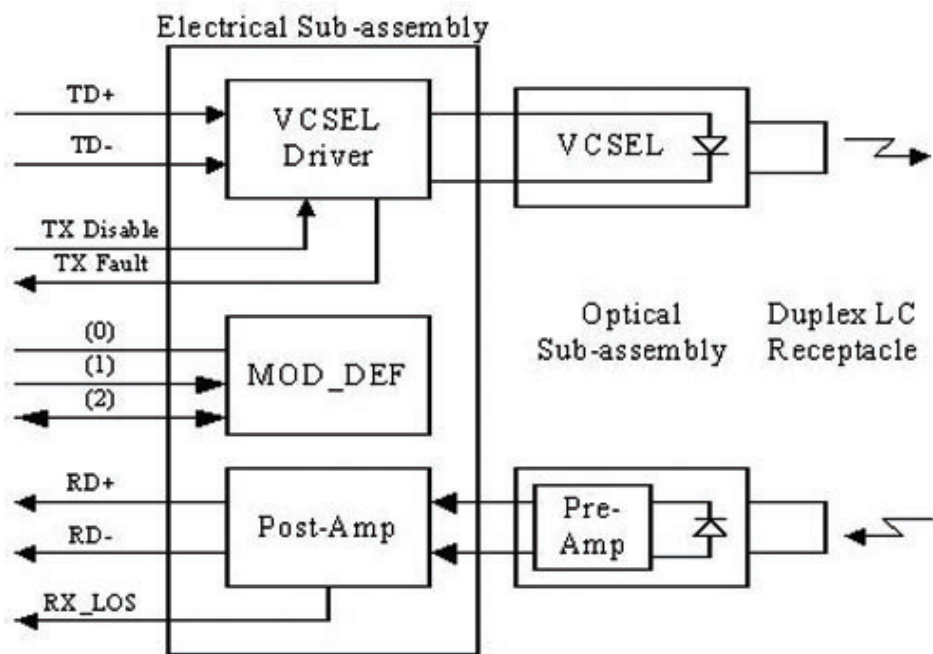


Pin out Diagram of Transceiver:

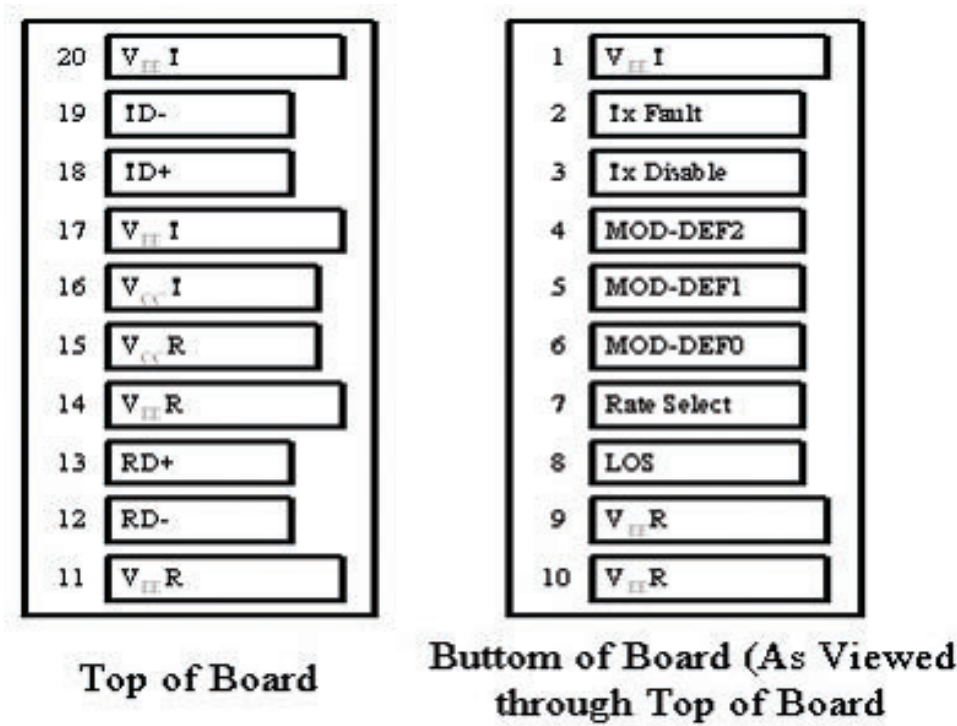


Pin Out Table:

Pin	Symbol	Functional Description
1	VeeT	Transmitter Ground
2	TX Fault	Transmitter Fault Indication
3	TX Disable	Transmitter Disable – Module disables on high or open
4	MOD-DEF(2)	Module Definition 2 – Two wire serial ID interface
5	MOD-DEF(1)	Module Definition 1 – Two wire serial ID interface
6	MOD-DEF(0)	Module Definition 0 – Grounded in module
7	Rate Select	Not Connected
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverse Received Data Out
13	RD+	Received Data Out
14	VeeR	Receiver Ground
15	VeeR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmitter Data In
19	TD-	Inverse Transmitter Data In
20	VeeT	Transmitter Ground

Recommended Circuit Schematic:

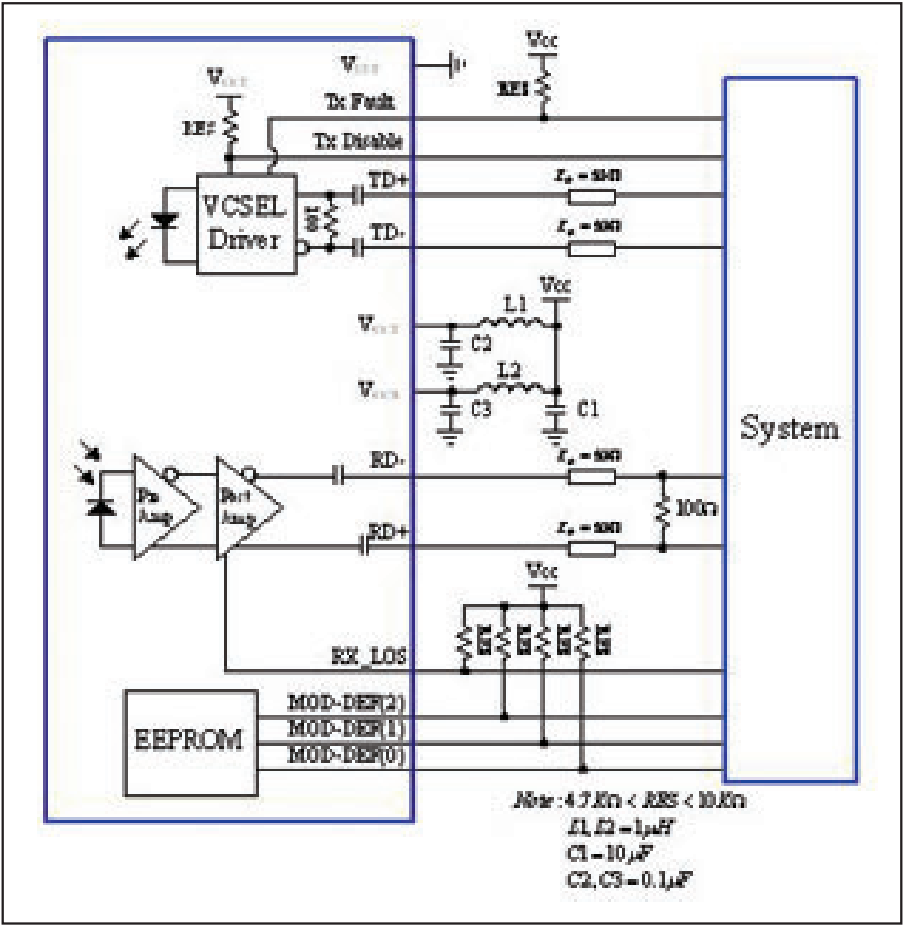

Mechanical Dimensions:

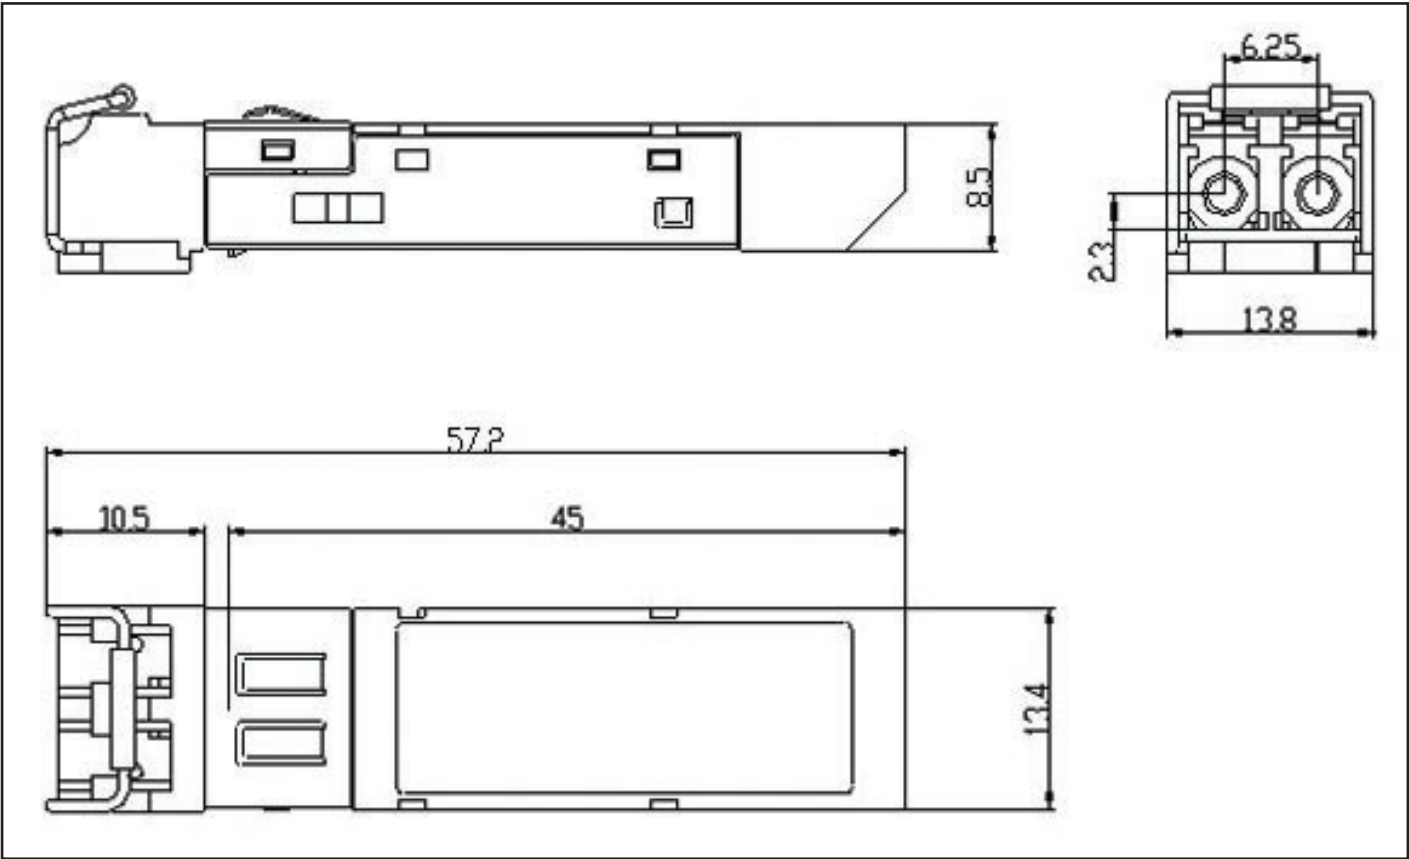

All dimensions are  $\pm 0.2\text{mm}$  unless otherwise specified.

Claim:

CADYCE reserves the right to make changes in the specification described hereinafter without prior notice.

Package Contents:  
CA-1GSFPMM

Other Products:  
CA-1GSFP10 | CA-10GSFP10

EAN Code:  
CA-1GSFPMM - 0700587952661

Certifications:  
CE FC RoHS

Box: L165.1mm X W 114.3mm X H 82.55mm  
L 6.5 x W 4.5 x H 3.25in

[www.cadyce.com](http://www.cadyce.com)

Cadyce is a registered trademark. All other trademarks belong to their respective proprietors. Copyright ©, All rights reserved.