


CA-CHM60 C-TRIO

USB-C® 3.1 to HDMI 4K@60Hz
Multi-Port Converter

CADYCE CA-CHM60 facilitates the connection of an external HDMI display to your USB-C®-enabled computer, offering an extra USB 3.0 port and a USB-C® 100W PD charging port for enhanced functionality.



Application

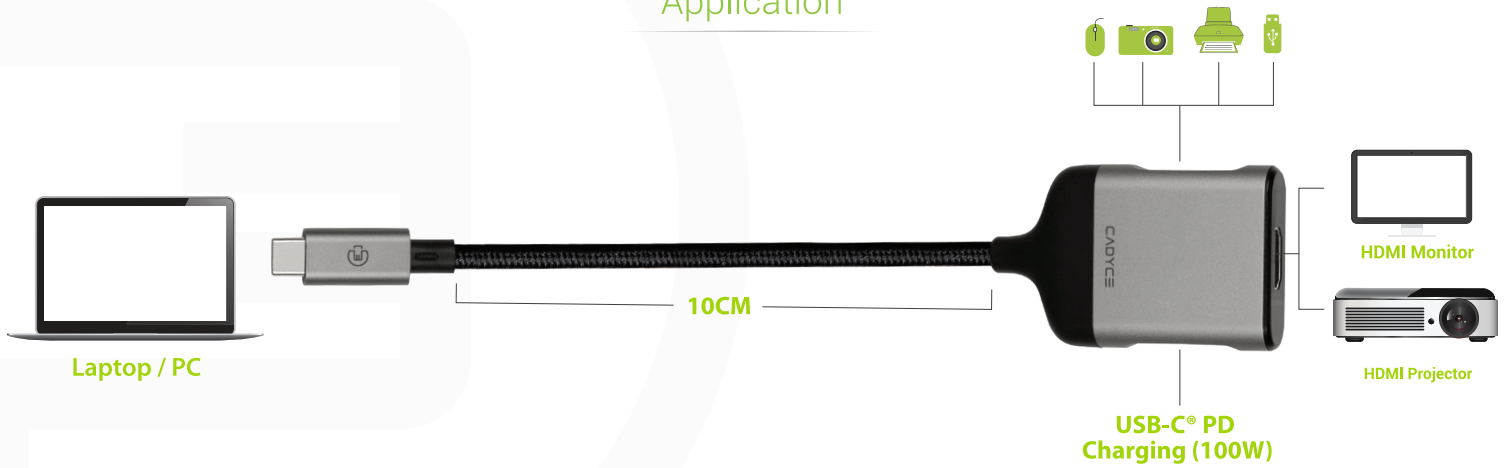

Features

- HDMI 2.0 port supports resolution of 4K@60Hz
- USB 3.0 port supports 5Gbps data transfer speed
- USB-C® PD charging port supports power delivery up to 100W
- Plug and Play
- Compact & Elegant housing with CADMIUM braided cable
- Supports Windows, Mac OS & Linux

Specifications

| ITEMS | DESCRIPTION |
|-------------------------------------|------------------------------------------------------|
| Input Connector/port Output port | USB 3.1 Type-C® Male, USB-C® PD HDMI 2.0, USB 3.0 |
| Resolution Supported | 4K x 2K@60Hz |
| Operating Temperature | 0 °C to +45 °C |
| Operating Humidity | 10% to 85 % RH (no condensation) |
| Storage Temperature | -10 °C to +70 °C |
| Storage Humidity | 5% to 90 % RH (no condensation) |
| Power Source | USB Bus Power |
| Certifications | FCC, CE, RoHS, UK, CA |

Other Products:

CA-CHM, CA-CVM, CA-CU3HG

Certifications:



Includes: CA-CHM60, User Manual

Package Dimensions (L X W X H):

Box: L 95 mm X W 25 mm X H 175 mm | L 3.74in X W 0.98 in X H 6.88in

EAN Code:

CA-CHM60 - 0658215618987

www.cadyce.com

Cadyce is a registered trademark. All other trademarks belong to their respective proprietors. Copyright ©, All rights reserved.