


# CA-DP3HDMI DPvi3ES

DisplayPort™ to Triple HDMI  
Converter with Audio

CADYCE CA-DP3HDMI allows a single DisplayPort output to connect three separate 4K HDMI displays simultaneously.



## Application

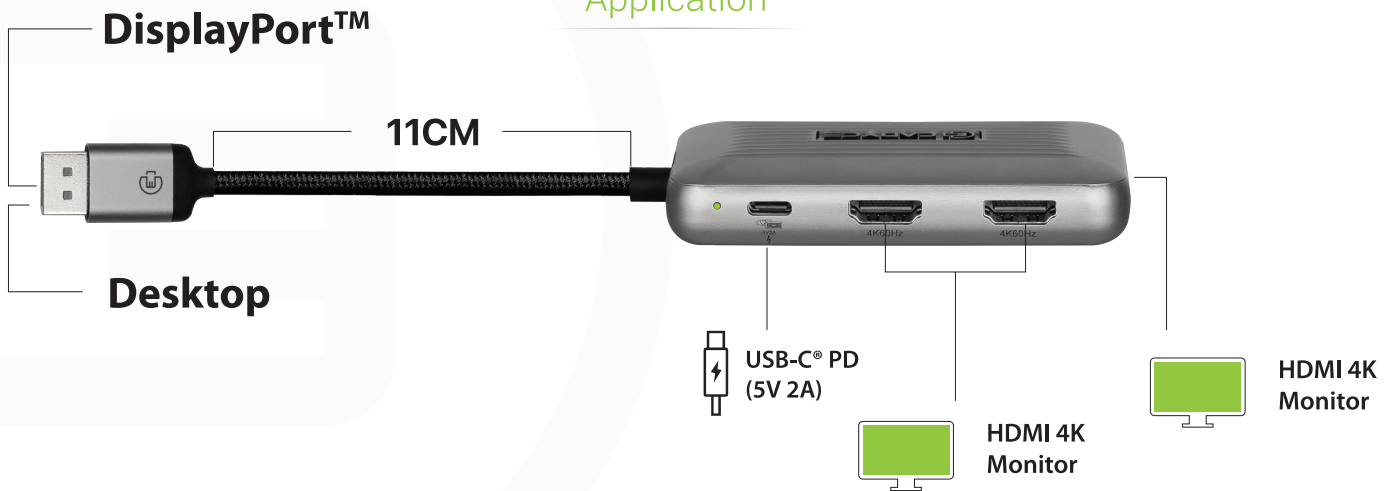

## Features

- Supports resolutions up to 4K (3840x2160)@60Hz for 1 or 2 displays else 4K@30Hz
- Compliant with DisplayPort 1.4 and HDMI 2.0.
- Supports High Dynamic Range (HDR) for enhanced colour and contrast.
- Plug-and-play functionality, no driver installation required.
- Compatible with Windows, MacOS, and Linux operating systems.
- Supports Multi-Stream Transport (MST) for independent display output.

## Specifications

ITEMS	DESCRIPTION
Input	1 x DisplayPort™ 1.4, 1 x USB-C® PD
Output	3 x HDMI 2.1
Resolution Support	Up to 4K (3840x2160)@60Hz for 1 or 2 HDMI outputs Up to 4K (3840x2160) @ 30Hz for 3 simultaneous HDMI outputs
Display Mode	Extended and Mirror Mode
HDCP Compliance	HDCP 2.2
Power Supply	USB-C® PD (5V, 2A)
Dimensions	92mm x 54mm x 14mm, Cable Length – 11cm
Operating Temperature	0°C to 45°C
Storage Temperature	-10°C to 80°C
Operating Humidity	10% to 85% RH (no-condensation)
Storage Humidity	5% to 90% RH (no-condensation)
Certifications	CE, FCC, UK, CA, RoHS

### Other Products:

CA-C2DP, CA-C8KDP, CA-DPHDMI

### Certifications:



**Includes:** CA-DP3HDMI, User Manual, USB Cable

### Package Dimensions (L X W X H):

Box: L 118 mm X W 25 mm X H 185 mm | L 4.64 in X W 0.98 in X H 7.28 in

### EAN Code:

CA-DP3HDMI - 0602835298180

[www.cadyce.com](http://www.cadyce.com)

Cadyce is a registered trademark. All other trademarks belong to their respective proprietors.  
Copyright ©, All rights reserved.