


CA-16HDSP

1 x 16 HDMI Splitter with 4K support



CADYCE CA-16HDSP allows you to effortlessly duplicate a single HDMI source to 16 HDMI displays simultaneously, delivering stunning 4K video and crystal-clear audio without any loss in quality.

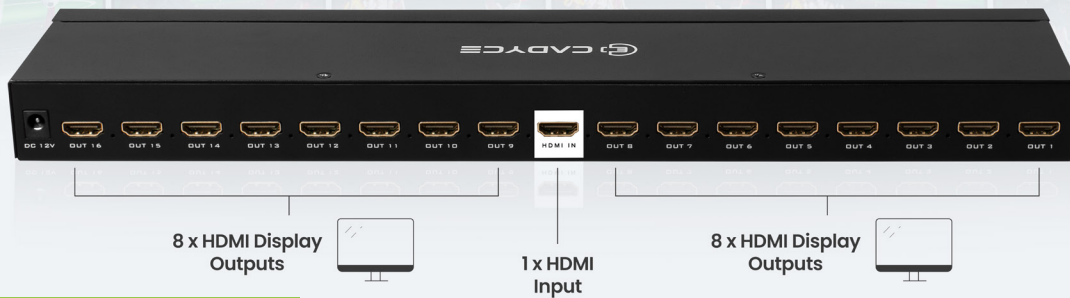

Features:



Resolution support of up to 4K@60Hz (4:4:4).



Supports Full 3D Pass Through.



Full HD Support.



Supports HDMI 2.0, Backward Compatible.



Supports HDCP 2.2, Backward Compatible.



Transmission Bandwidth up to 18Gbps.



Supports 30/36 bit dark colour.



Automatic identification, Plug & Play

Note:

For best viewing (4K@60Hz) experience please ensure that the length of input and output HDMI cable is less than 10m.

Retail Stores & Showrooms

Specifications

Items	Descriptions
Input Ports	1 x HDMI (Female),
Output Port	16 x HDMI (Female)
Max Bandwidth	18Gbps
Max Resolution	4096 x 2160 / 3840 x 2160@60Hz (4:4:4)
HDR Technology	DolbyVision, HDR10, HLG & SL-HDR1
Colour	RGB/YCbCr444, YCbCr422, YCbCr420
Audio Format	Bypass
CEC Function	Not Supported
EDID	Combination
Cable Length	1080P: 40m, 4K30: 35m, 4K60: 10m
Cable Specifications	28AWG, 26AWG, 24AWG
Electrostatic Protection	8KV (Contact Discharge)
Operating Temperature	-0°C to 50°C
Storage Temperature	-20°C to 60°C
Housing	Metal
Power Supply & Power Consumption	12V DC, 12W (Max.)
Certifications	CE, FCC, RoHS, UK, CA
Dimensions	392 x 83 x 32mm

Other Products:

CA-4HDSP | CA-8HDSP
CA-2VSP | CA-4VSP.

Includes:

1 x CA-16HDSP | 1 x Power Adapter (DC 5V 2A) |
Rackmount Kit | 1 x User Manual.

EAN Code:

CA-16HDSP - 073403851356

Certifications:



Package Dimensions (L X W X H):

Box: L 35 mm X W 400 mm X H 250 mm |
L 1.4 in X W 15.7 in X H 9.8 in

IS 13252 (Part 1)/
IEC 60950-1



R-41285544

