


CA-NVR9

9 Channel NVR

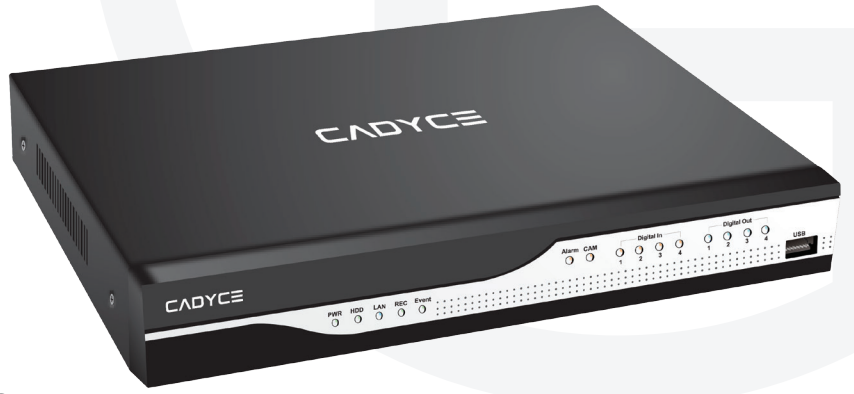

Cadyce NVRs allows you to view, record and control IP Cameras connected in your network with the help of one centralised interface. These NVRs can also be accessed remotely over the Internet.

Features:


Feature	Description
Support Cameras	CA-NVR9 Up to 9 IP cameras. Max total bandwidth 48Mbps for CA-NVR9
Video Codec	H.264
Audio Codec	G.726 / G. 711
Resolutions	QVGA / VGA / SXGA / FULL HD / 3M / 5M
Audio	<ul style="list-style-type: none"> • Volume adjustable / Mute • Two way audio
Live Preview	<ul style="list-style-type: none"> • Support 1 / 4 / 9 division • Full-screen • Snapshot • Selectable display cameras
Digital Zoom /ePTZ	<ul style="list-style-type: none"> • Google earth like digital zoom
PTZ	<ul style="list-style-type: none"> • Support PTZ cameras • PTZ / Preset / Tour / Auto pan / Iris / Focus /Speed • Add / Remove / Goto preset
Record	<ul style="list-style-type: none"> • Schedule recording each camera • Round the clock / motion record modes / DI detection / Event trigger • Pre-alarm / Post-alarm configuration • Auto recycle record files by HDD spaces
Record Device	<ul style="list-style-type: none"> • 2 x SATA Internal HDD • 1 x eSATA • Samba path support
Playback	<ul style="list-style-type: none"> • 1 / 4 / 9 Division • Full-screen • Graphical interface • Play / Reverse / Pause / Seek / Pre- I frame / Next Frame • Speeds: 1/4, 1/2, 1, 2, 4, 8, 16, 32 • Volume control • Convert to AVI • Multi-Cameras Period Backup
Multi-Language	<ul style="list-style-type: none"> • Multi-language selectable • English / Traditional Chinese / German / Greece / Tai
Event Detection	<ul style="list-style-type: none"> • Motion / DI / Disconnect / HDD / Schedule trigger • Schedule-able Event Detection
Alarm	<ul style="list-style-type: none"> • Buzzer / DO / Display on Screen / Record / Snapshot / E-Mail / TCP / HTTP / FTP
Notification	<ul style="list-style-type: none"> • SMTP / HTTP / FTP / TCP • Address Book management
User authentications	<ul style="list-style-type: none"> • User management • Function permissions
Camera setting	<ul style="list-style-type: none"> • DVR like(auto setting) • Auto Search • Profile selectable
Schedule setting	<ul style="list-style-type: none"> • Graphical interface • Weekly schedule
Network	<ul style="list-style-type: none"> • Fix IP / DHCP / PPPOE / DIPS Report / UPNP transversal

System time	<ul style="list-style-type: none"> • Manual setting • NTP support • DST support
Motion detection	<ul style="list-style-type: none"> • Detection windows setting (Max 10 windows) • Sensitivity adjust
Snapshot	<ul style="list-style-type: none"> • Preview snapshot in HDD or Remove-able device • Search Event Snapshot • Backup snapshot to remove-able device
Disk Management	<ul style="list-style-type: none"> • Partition management • Format partition • Samba management
Maintenance	<ul style="list-style-type: none"> • Resolution selectable, 1024x768 / 1280x1024 / 1366x768 / 1440x900 / 1920x1080 • Display style select-able, Normal / Simple / Professional / Advance • Screen adjustment, Brightness / Contrast / Saturation / Hue • Reset default • Backup / Restore setting • Firmware upgrade • System Restart
Remote	<ul style="list-style-type: none"> • Fully function remote live preview • Fully function remote playback • Support low bit-rate connection with live preview and playback • Selectable camera connection
CMS support	<ul style="list-style-type: none"> • Remote live preview / playback by NVR or Group • NVR / Camera Group management • PTZ

Hardware Specification:

Model	CA-NVR9
SoC	ARM Cortex A9
LAN Port	1 x Giga RJ-45 Ethernet port
Video Output	VGA D-sub + HDMI
Audio Input	MIC x 1 (phone jack 3.5mm)
Audio Output	Phone Jack 3.5mm x 1
HDD	SATA HDD Up to 3TB x 2
E-SATA	1 E-SATA
Backup	USB Mass Storage
LED Indicator	System Ready, HDD R/W, LANx1 , Record Schedule x1 , Event Schedule x1, Alarm x1 , Camera status x1, DI x4 , DO x4
USB	1 For Mouse / 1 For Backup
Sensor In / Alarm Out	4 Digital in / 4 Digital out
Button	Factory Default Reset
H/W WDT	H/W Watch Dog
RTC	RTC
Buzzer	1 Buzzer
Power	External Adaptor, AC100-240V/in, DC12V(4A)
Temperature	0~40°C
Humidity	0%~85% R.H.
Housing	2 HDD version
Dimensions	330 x 57 x 252 mm
Weight	1455g
Certification	CE, FCC

Application:

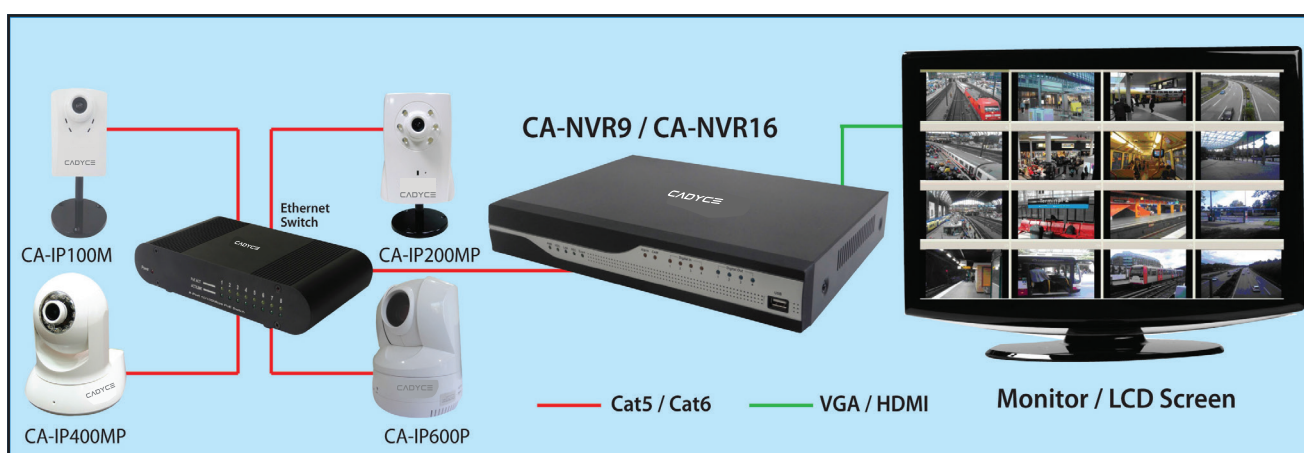

Package Contents:

CA-NVR9
Power Adapter 12V DC
Quick Installation Guide
Utility CD-ROM

Certifications:



Other Products:

CA-NVR4 | CA-NVR16

Box: L 444.5 mm X W 181 mm X H 127mm
L 17.5 x W 15 x H 5 in

EAN Code:

CA-NVR9 - 0700587952593

www.cadyce.com

Cadyce is a registered trademark. All other trademarks belong to their respective proprietors. Copyright ©, All rights reserved.